


Self-install Instructions

PureFiber-Cable Failover (Upgrade from C-A-F) - Self Install Guide

Skyway West - May 2019



Your current setup

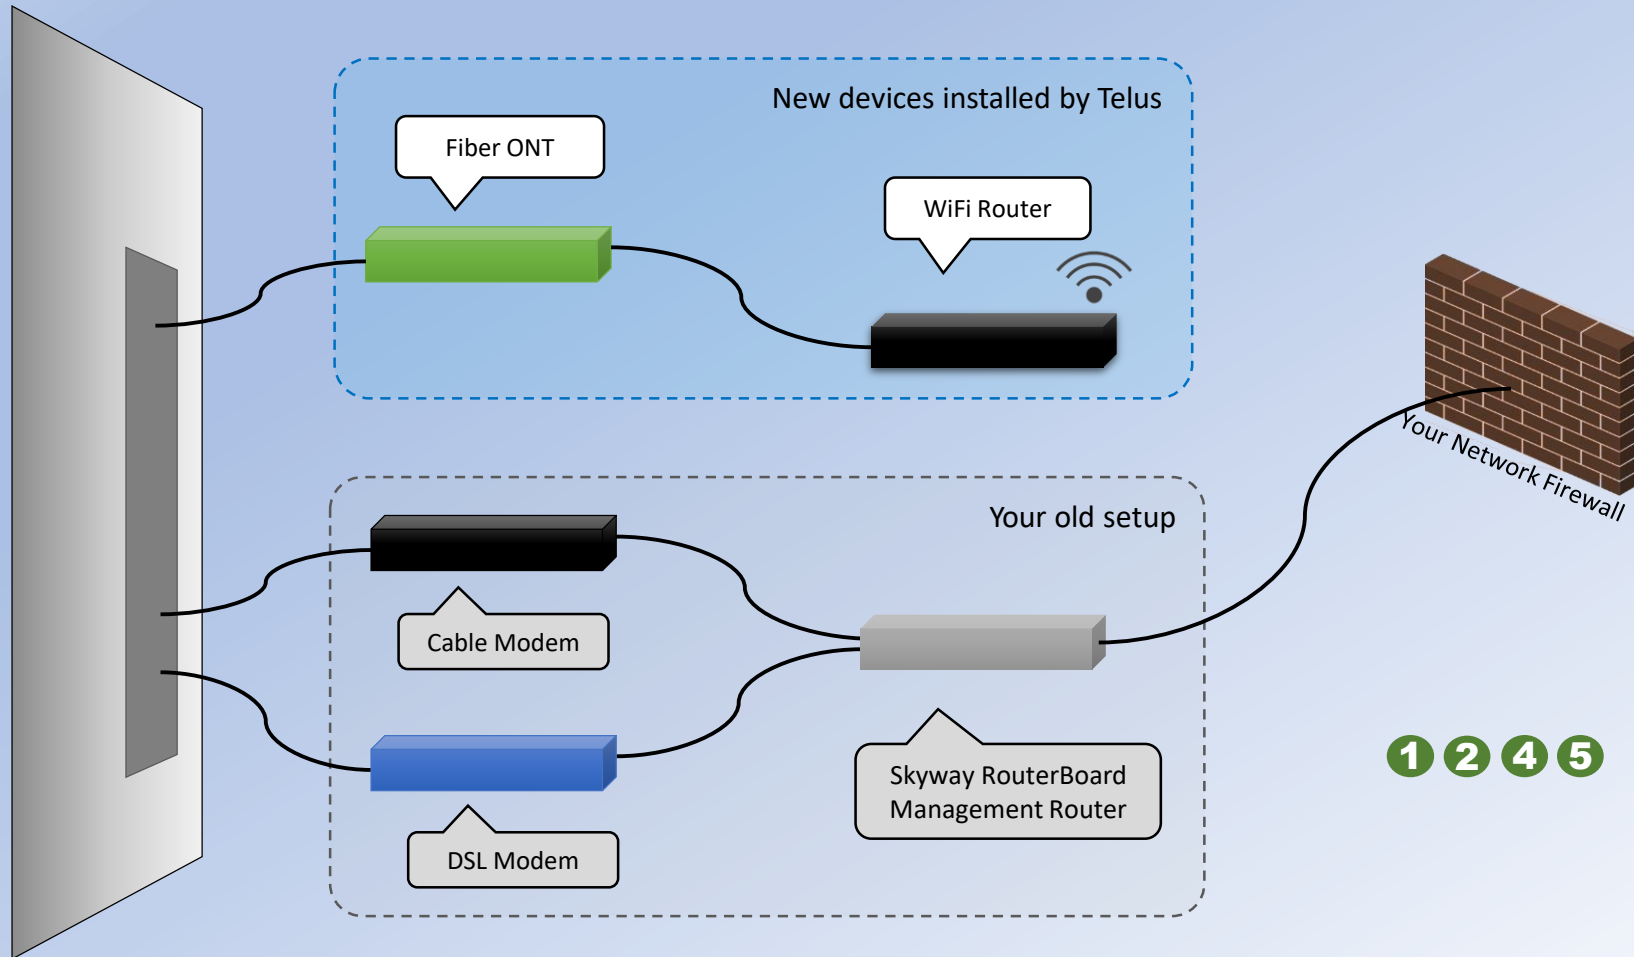

This is what your service setup will look like immediately after Telus completes their PureFiber Installation

Please follow this guide to fully complete the installation of your connectivity solution.

IMPORTANT:
You will lose connectivity during this process. Please proceed **ONLY** when it is okay to do so.

Call Skyway West Support if you need assistance:
604-482-1212


Don't forget to plug in!



All devices described within this guide must be plugged in to appropriate power outlets.


The diagrams herein do NOT show power cords in order to keep them simple and easy to understand.

Unplug cables as shown

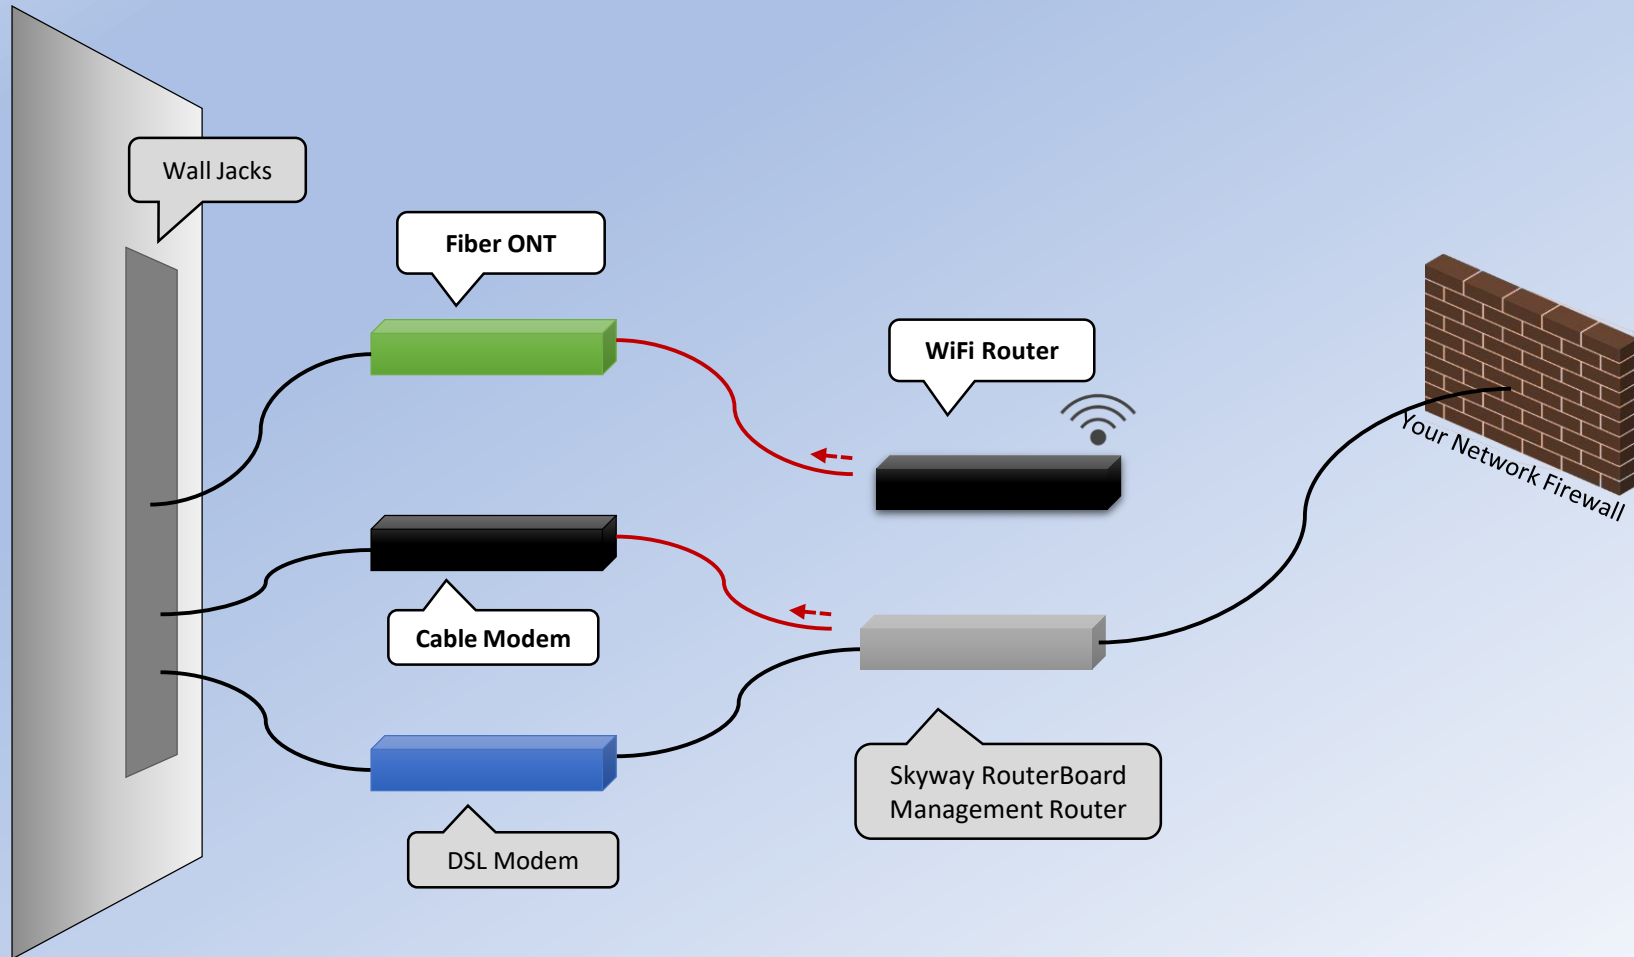


1. Unplug the Fiber ONT from the WiFi Router
2. Unplug the Cable Modem from the Management Router (from Port 1)

Connect your Fiber device

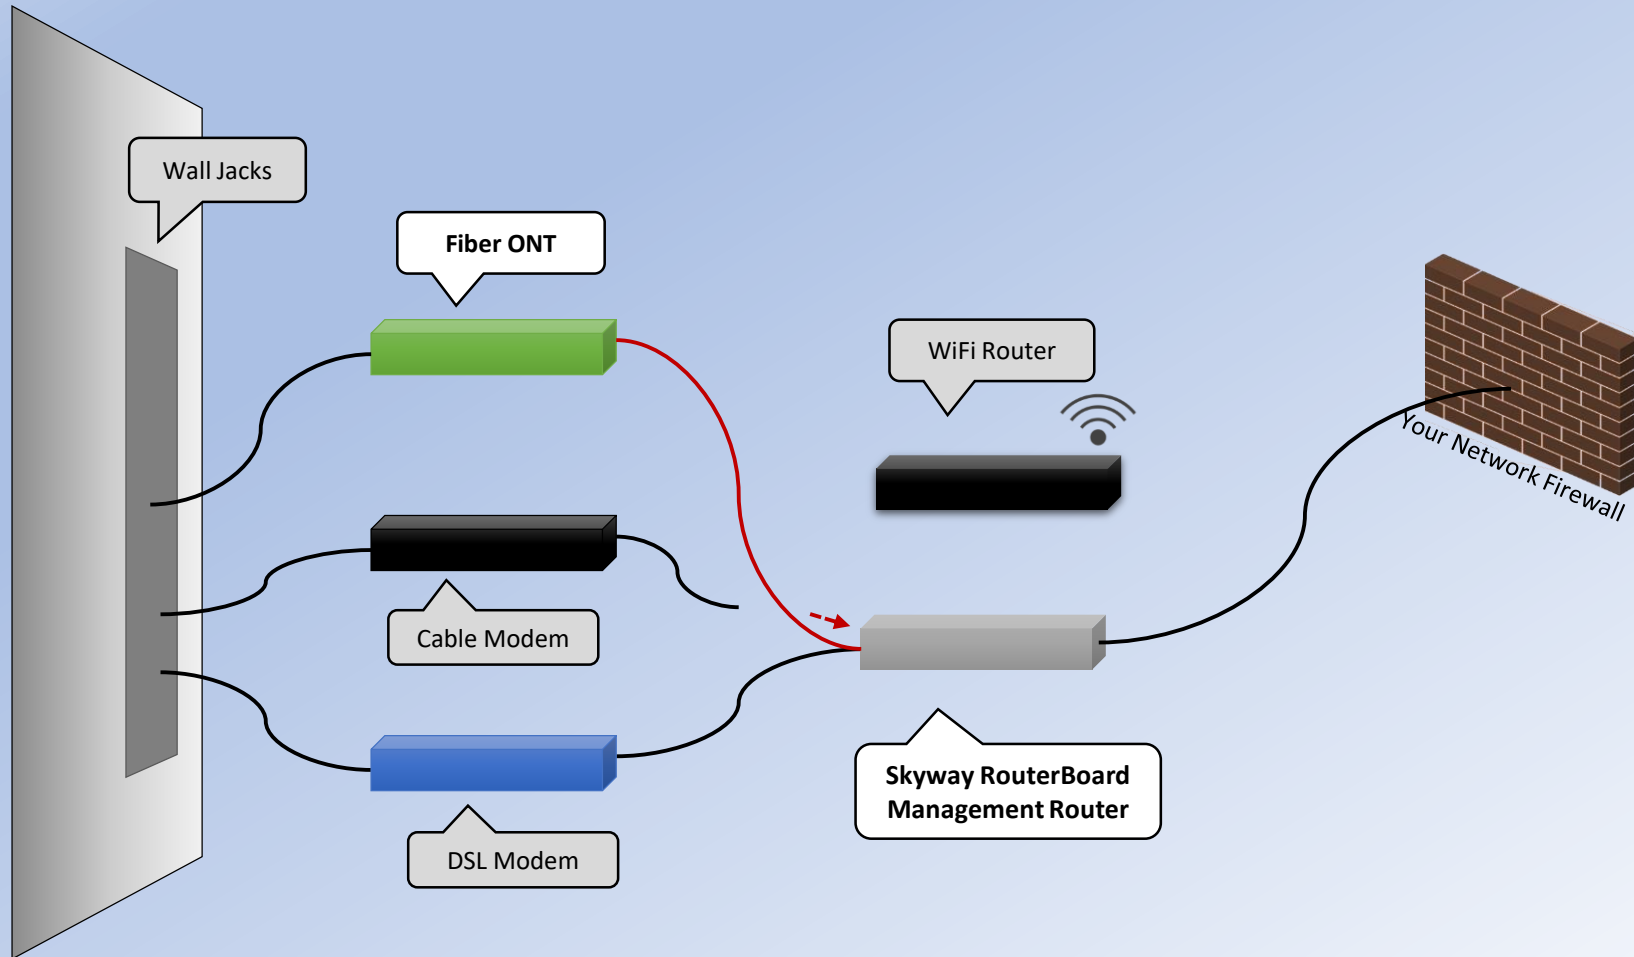


3. Plug the Fiber ONT into Port 1 of the Management Router

Remove the DSL device

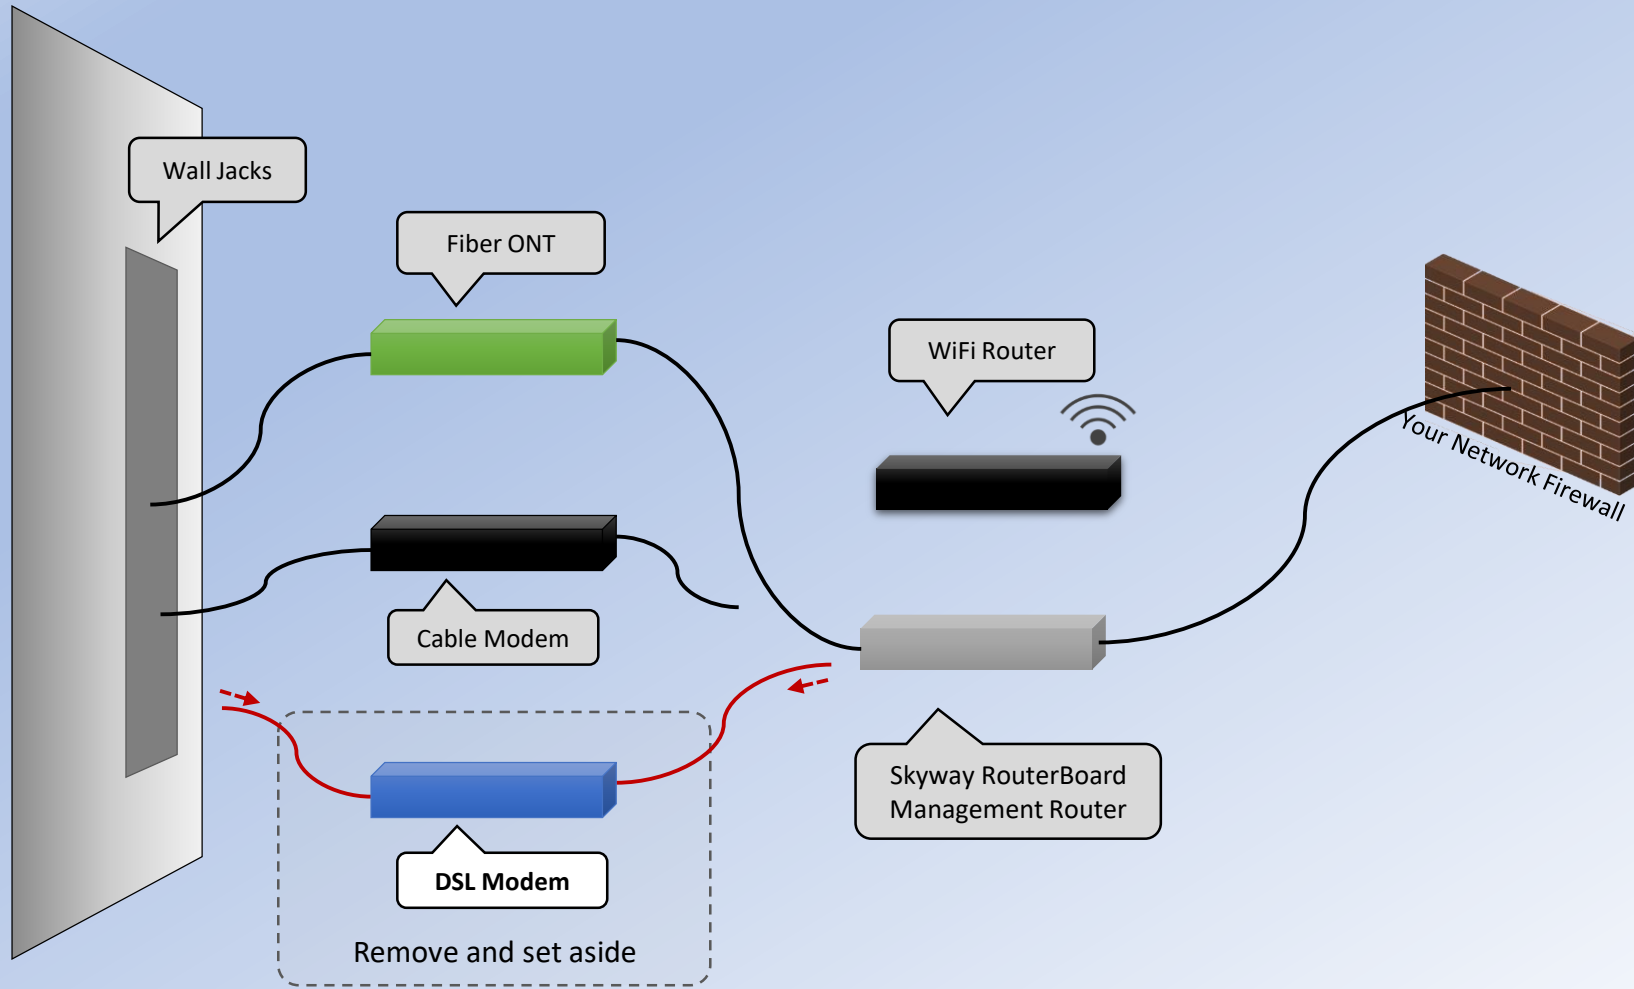

4. Once connectivity has been established on the Fiber ONT, unplug the DSL and remove it entirely from your setup and set it aside (to be returned)

Reconnect Cable modem and connect WiFi router

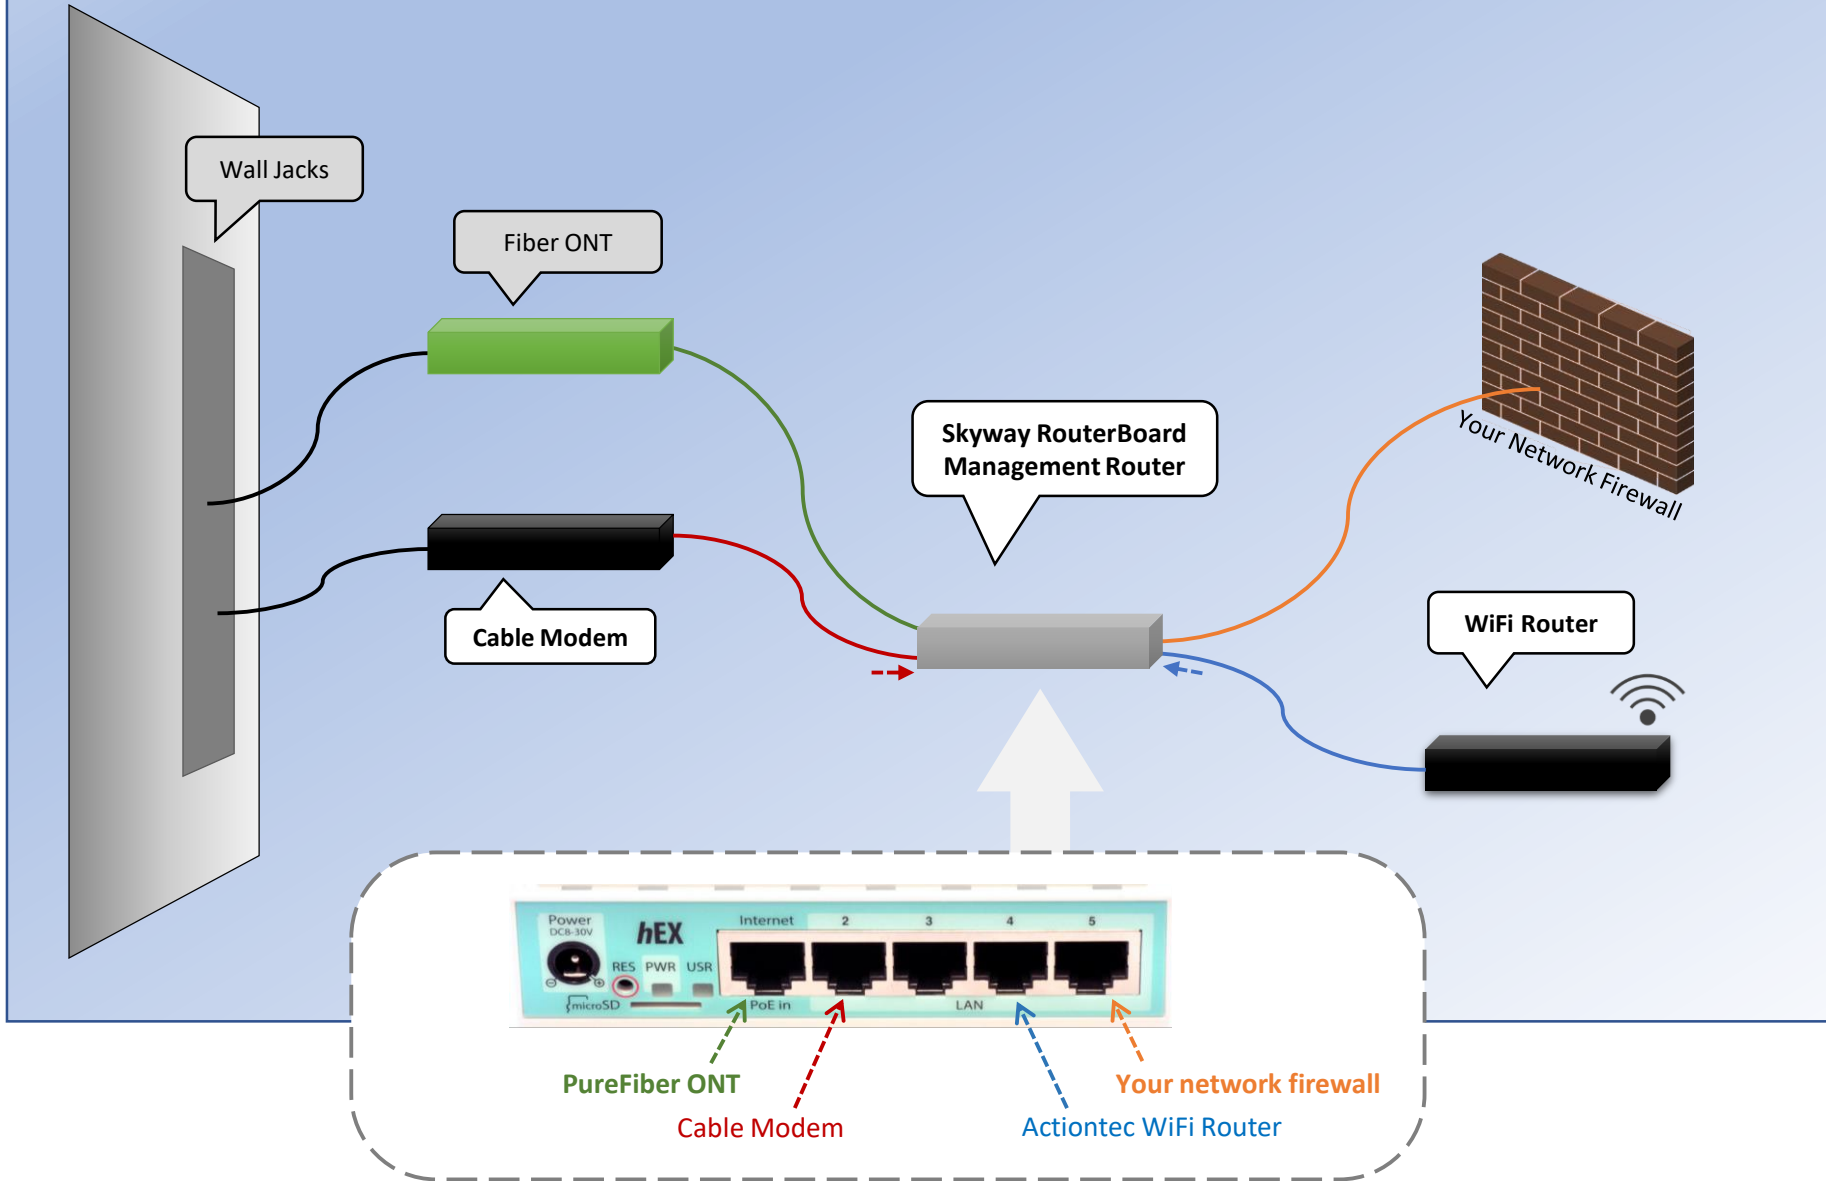

5. Connect your Cable Modem to Port 2

6. Connect your WiFi router to Port 4


Please see port diagram

Set aside, to be returned



DSL Modem

Your Finished Setup

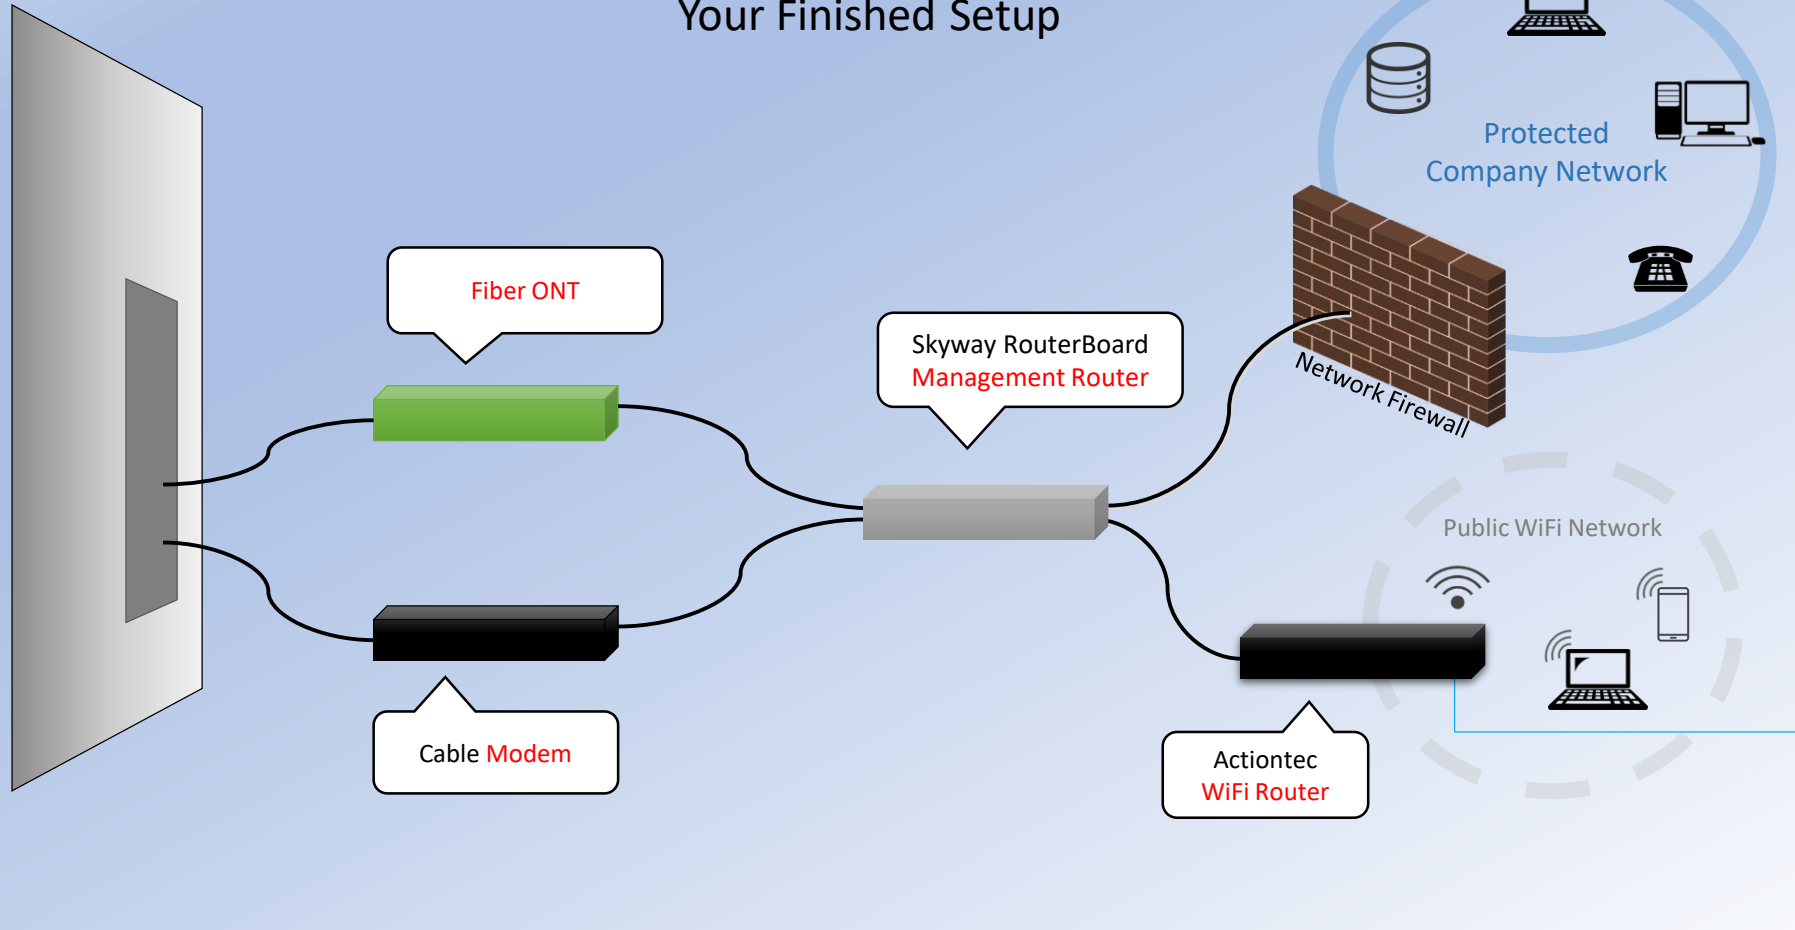

The **Actiontec T3200** WiFi router is configured for public WiFi. WiFi internet traffic is separated from LAN internet traffic; WiFi users cannot reach your LAN directly through our management router.

In order to reach your internal network, WiFi traffic is tunneled to Skyway and returns through your Internet connection to your LAN firewall.

If you prefer to not use the Actiontec WiFi router, please inform provisioning@skywaywest.com.

The public WiFi SSID and Password are written on the Actiontec WiFi router.